

This quick reference guide to refrigeration accessories will help to make sure you have what you need for a successful installation in just 3 easy steps.

Step 1 Find your model number.

Step 2 Read the information on required and optional accessories to determine your needs and prepare yourself by knowing the answers to the following questions.

- If purchasing a refrigerator with a dispenser and / or an automatic ice maker, do you have a cold water supply at the installation location?
- Do you have a reverse osmosis water filter system connected to your cold water supply?
- Do you have a grounded 3-prong electrical outlet within 6 ft. and a min. 15 Amp circuit?
- If purchasing a top or bottom freezer refrigerator, do you need to reverse the doors?

Step 3 Identify the items you need to purchase for your refrigerator appliance.

Where to purchase accessories

Accessories can be purchased in-store with unit, or from LG Canada Parts & Accessories:

Shop online at [LGCANADAPARTS.COM](https://www.lgcanadaparts.com)

Call 1-855-341-2732







Contents

36" French door	2
33" French door.....	3
30" French door.....	4
Side-by-side	5
Top freezer	6
Bottom freezer	7
Specialty	8



LG 36" french door refrigerators accessory guide



<p>Water supply requirements</p> <p>LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*</p>		<p>Required purchase</p>	<p>1/4" Outer diameter copper or pex tubing</p>	
<p>Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.</p>		<p>Required purchase</p>	<p>Two 1/4" outer diameter compression nuts and two ferrules (sleeves)</p>	
<p>Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**</p>		<p>Required purchase</p>	<p>Water shutoff valve</p>	
<p>Electrical requirements</p> <p>LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.</p>		<p>Included</p>	<p>3-Prong power cord</p>	
		<p>Required purchase</p>	<p>Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)</p>	
<p>Water filter</p> <p>Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT1000P replacement water filter (built-in water filter bypass)</p>	
<p>Fresh air filter</p> <p>Select LG refrigerators include 1 fresh air filter. It is recommended to change the air filter approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT120F replacement fresh air filter</p>	<p>Not applicable</p>

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.




Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at [LGCANADAPARTS.COM](https://www.lgcanadaparts.com)

Call 1-855-341-2732

LG 33" french door refrigerators accessory guide

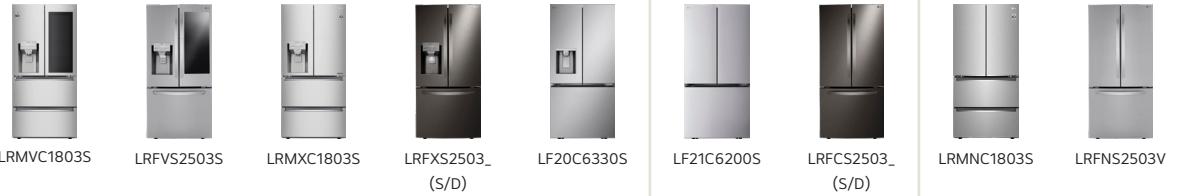

<p>Water supply requirements</p> <p>LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*</p>		<p>Required purchase</p>	<p>1/4" Outer diameter copper or PEX tubing</p>		<p>Not applicable</p>
<p>Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.</p>		<p>Required purchase</p>	<p>Two 1/4" outer diameter compression nuts and two ferrules (sleeves)</p>		<p>Not applicable</p>
<p>Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**</p>		<p>Required purchase</p>	<p>Water shutoff valve</p>		<p>Not applicable</p>
<p>Electrical requirements</p> <p>LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.</p>		<p>Included</p>	<p>3-Prong power cord</p>		
<p>Water filter</p> <p>Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT1000P replacement water filter (built-in water filter bypass)</p>	<p>LT1000P replacement water filter (built-in water filter bypass)</p>	<p>Not applicable</p>
<p>Fresh air filter</p> <p>Select LG refrigerators include 1 fresh air filter. It is recommended to change the air filter approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT120F replacement fresh air filter</p>	<p>Not applicable</p>	<p>Not applicable</p>

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732








LG 30" french door refrigerators accessory guide



LRFWS2200S



LRFNS2200_ (S/D/W)

<p>Water supply requirements LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*</p>		<p>Required purchase</p>	<p>1/4" Outer diameter copper or PEX tubing</p>	<p>Required only if purchasing the optional ice maker</p>
<p>Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.</p>		<p>Required purchase</p>	<p>Two 1/4" outer diameter compression nuts and two ferrules (sleeves)</p>	<p>Required only if purchasing the optional ice maker</p>
<p>Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**</p>		<p>Required purchase</p>	<p>Water shutoff valve</p>	<p>Required only if purchasing the optional ice maker</p>
<p>Electrical requirements LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.</p>		<p>Included</p>	<p>3-Prong power cord</p>	
		<p>Required purchase</p>	<p>Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)</p>	
<p>Ice maker</p>		<p>Optional purchase</p>	<p>Ice maker already included</p>	<p>LK55C optional ice maker</p>
<p>Water filter Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT1000P replacement water filter (built-in water filter bypass)</p>	<p>Not applicable</p>
<p>Fresh air filter Select LG refrigerators include 1 fresh air filter. It is recommended to change the air filter approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Not applicable</p>	<p>Not applicable</p>	<p>Not applicable</p>

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732

LG side-by-side refrigerators accessory guide



SRSXB2622S



LS29S3230V



LS23C4230V

<p>Water supply requirements LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*</p>		<p>Required purchase</p>	<p>1/4" Outer diameter copper or PEX tubing</p>	
<p>Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.</p>		<p>Required purchase</p>	<p>Two 1/4" outer diameter compression nuts and two ferrules (sleeves)</p>	
<p>Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**</p>		<p>Required purchase</p>	<p>Water shutoff valve</p>	
<p>Electrical requirements LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.</p>		<p>Included</p>	<p>3-Prong power cord</p>	
		<p>Required purchase</p>	<p>Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)</p>	
<p>Water filter Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.</p>		<p>Optional purchase</p>	<p>LT700P replacement water filter</p>	<p>LT1000P replacement water filter (built-in water filter bypass)</p>
<p>Water filter bypass Attaches in the water filter head and allows the water to flow to the dispenser and/or ice maker when the filter has been removed.</p>		<p>Optional purchase</p>	<p>ABN73019101</p>	<p>Not applicable</p>
<p>Fresh air filter Select LG refrigerators include 1 fresh air filter. It is recommended to change the air filter approximately every 6 months. Order an extra filter now to keep on-hand.</p>			<p>Not applicable</p>	

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732

LG top freezer refrigerators accessory guide



LTCS20020_ (S, W)



LT18S2100S



LT13C2000V



LT11C2000V



LRTNC0915V

Water supply requirements

LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*




Optional purchase

Required only if purchasing the optional ice maker

Not applicable

Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.




Optional purchase

Required only if purchasing the optional ice maker

Not applicable

Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**




Optional purchase

Required only if purchasing the optional ice maker

Not applicable

Electrical requirements

LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.



Included

3-Prong power cord

Required purchase

Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)

Ice maker



Optional purchase

LK65C optional ice maker

LK50C optional ice maker

Not applicable

Water filter

Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.



Not applicable

Not applicable

Water filter bypass

Attaches in the water filter head and allows the water to flow to the dispenser and/or ice maker when the filter has been removed.



Not applicable

Not applicable

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732

LG bottom freezer refrigerators accessory guide



LRDCS2603S



LRDNS2200_ (S/W)



LBNC15251V



LBNC12231_ (V/W)



LRDNC1004_ (V/W)



LSBNC1021P

Water supply requirements

LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 PSI.*




Required purchase

1/4" Outer diameter copper or PEX tubing

Required only if purchasing the optional ice maker

Not applicable

Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.




Required purchase

Two 1/4" outer diameter compression nuts and two ferrules (sleeves)

Required only if purchasing the optional ice maker

Not applicable

Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**



Required purchase


Water shutoff valve

Required only if purchasing the optional ice maker

Not applicable

Electrical requirements

LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.



Included

3-Prong power cord

Required purchase

Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)

Ice maker



Optional purchase

Ice maker already included

LK55C optional ice maker

Not applicable

Water filter

Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.



Optional purchase

LT1000P replacement water filter (built-in water filter bypass)

Not applicable

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732

LG specialty refrigerators accessory guide



LROFC1114G



LRONC1414G



LROFC1104V



LRONC1404V



LRKNS1400V

Water supply requirements

LG refrigerators must be connected to a cold water supply for operation of the water dispenser and / or automatic icemaker. Required min. / max. water pressure is 20–120 psi.*




Not applicable

Not required

Not required

Compression nuts and ferrules are used to connect the copper tubing to the shutoff valve and the refrigerator water valve.




Not applicable

Not required

Not required

Shutoff valve to connect to the cold water line. A shutoff valve should have a water inlet with a minimum inside diameter of 5/32" at the point of connection to the cold water line.**




Not applicable

Not required

Not required

Electrical requirements

LG refrigerators have a 3-prong power cord attached to the unit. A grounded outlet located within 6 ft. of the unit and a min. 15 Amp circuit is required.



Included

3-Prong power cord

Required purchase

Power cord connects to an individually grounded outlet: 115 V, 60 Hz grounded 3-prong outlet (15 Amps)

Water filter

Select LG refrigerators include 1 water filter. It is recommended to change the air filter every 200 gallons or approximately every 6 months. Order an extra filter now to keep on-hand.



Not applicable

Not applicable

Not applicable

Optional door panels

Default panel colour is beige glass. 5 additional colours available. Sold separately. Professional installation available by LG Parts & Service. Installation fees are not included.



Optional purchase

Pink glass AGF30133495
Mint glass AGF30133496
Silver stainless AGF30133501
Green stainless AGF30133502
Matte black stainless AGF30133506

Not applicable

*40–60 psi min. when a reverse osmosis water filtration system is connected to the cold water supply. **Saddle-type shutoff valves are included in many water supply kits. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.



Accessories can be purchased in-store with unit, or from LG Parts & Accessories:

Shop online at LGCANADAPARTS.COM

Call 1-855-341-2732